

50VA 120/240 VOLTS TO 12/24 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$78.39 USD



Single Phase Control Transformer with a capacity of 50VA, transforming 120/240 Volts to 12/24 Volts

SKU: CS50K-Z

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA	Overall Dimensions				Mounting Feet
Rating	A	B	C	F	Mounting Feet
25	3	3	2.5	2.5	5.13 0.25 x 0.425
50	3	4	2.5	2.5	5.13 0.25 x 0.425
100	3	4	2.5	3	5.75 0.25 x 0.425
150	3.75	4.25	3.13	3.25	5.5 0.25 x 0.425
200	3.75	4.5	3.13	3.25	5.5 0.25 x 0.425
250	3.75	5	3.13	3.25	5.5 0.31 x 0.425
350	4.5	5	3.75	3.75	4.75 0.31 x 0.425
500	5.25	5	4.38	4.5	4.75 0.31 x 0.425
750	5.25	5.5	4.38	4.5	4.75 0.31 x 0.425
1000	5.25	6.5	4.38	4.5	5.75 0.31 x 0.425
1500	6.75	7.25	5.63	5	5.25 0.31 x 0.425
2000	7.5	7.5	6.25	6	5.25 0.31 x 0.425
3000	7.5	8.75	6.25	6	5.5 0.31 x 0.425
5000	9	10	8	7	8 0.44 x 0.425

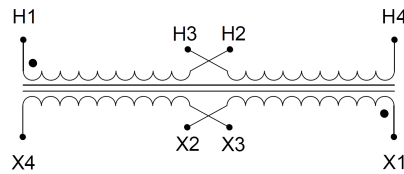

Single Phase Control Transformer with a capacity of 50VA, transforming 120/240 Volts to 12/24 Volts



PRODUCT SPECIFICATIONS

Weight	14 lbs
Phases	1
Connection	1Ph-CT-DD-SD
Primary Voltage	120/240
Primary Max Current	0.42A
Primary Markings	H1-H2-H3-H4
Primary Terminals	Terminals
Secondary Voltage	12/24
Secondary Max Current	4.17A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperature Rise	80°C
Insulation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

50VA 120/240 VOLTS TO 12/24
VOLTS SINGLE PHASE CONTROL
TRANSFORMER



VA	50
Country/Manufacturer	Canada/RPM