


#### **OFFICIAL QUOTE**

## 37.5KVA 230 VOLTS TO 400 VOLTS SINGLE PHASE AUTOTRANSFORMER



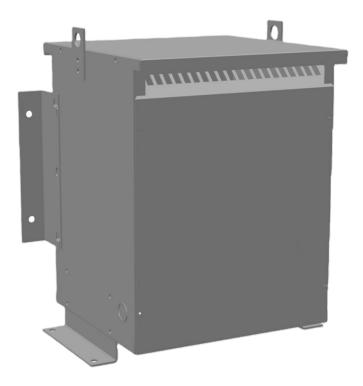

# 37.5KVA 230 VOLTS TO 400 VOLTS SINGLE PHASE AUTOTRANSFORMER


\$2,790.60 CAD


Single Phase Autotransformer with a capacity of 37.5kVA, transforming 230 Volts to 400 Volts

**SKU:** MC37C1-G1

**Categories:** <u>Autotransformer</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Autotransformer with a capacity of 37.5kVA, transforming 230 Volts to 400 Volts



#### **OFFICIAL QUOTE**

### **37.5KVA 230 VOLTS TO 400 VOLTS** SINGLE PHASE AUTOTRANSFORMER



#### **PRODUCT SPECIFICATIONS**

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 165.8 lbs  |
| Phases                     | 1  |
| kVA                        | <u>37.5</u>  |
| Connection                 | 1PhA-NT-1  |
| Primary Voltage            | 230  |
| Primary Max Current        | 94.1A  |
| Primary Markings           | <u>X0-X1</u>   |
| Primary Terminals          | #2/0-6 AWG   |
| Secondary Voltage          | 400  |
| Secondary Max Current      | <u>54.1A</u>   |
| Secondary Markings         | <u>H0-H1</u>   |
| Secondary Terminals        | #2-14 AWG  |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| Insulation Class           | 220°C (Class H)  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | <u>1.5 - 3.5%</u>  |
| Sound (db)                 | <u>45 dB</u>   |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | <u>E3R-4</u>   |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



#### **OFFICIAL QUOTE**

## 37.5KVA 230 VOLTS TO 400 VOLTS SINGLE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|