


OFFICIAL QUOTE

6KVA 120 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER



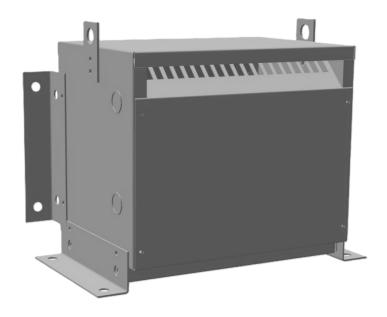

6KVA 120 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER

\$1,637.40 CAD

Three Phase Autotransformer with a capacity of 6kVA, transforming 120Y Volts to 380Y Volts

SKU: RC6A-F

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 6kVA, transforming 120Y Volts to 380Y Volts



OFFICIAL QUOTE 6KVA 120 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	27 lbs
Phases	3
kVA	<u>6</u>
Connection	3PhA-NT-1
Primary Voltage	120
Primary Max Current	28.9A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	Terminal Blocks
Secondary Voltage	380
Secondary Max Current	<u>9.1A</u>
Secondary Markings	H1-H2-H3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

6KVA 120 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------