



3KVA 200 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



\$1,129.50 CAD

Three Phase Autotransformer with a capacity of 3kVA, transforming 200Y Volts to 120Y Volts

SKU: RC3B1-A

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

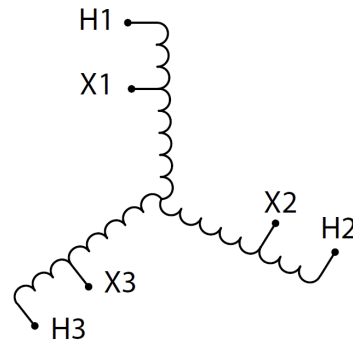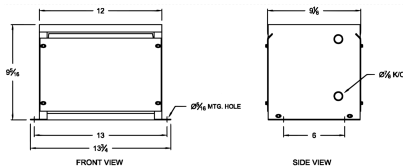

Three Phase Autotransformer with a capacity of 3kVA, transforming 200Y Volts to 120Y Volts



PRODUCT SPECIFICATIONS

Weight	20 lbs
Phases	3
kVA	3
Connection	3PhA-NT-1
Primary Voltage	200
Primary Max Current	8.7A
Primary Markings	H1-H2-H3
Primary Terminals	Terminal Blocks
Secondary Voltage	120
Secondary Max Current	14.4A
Secondary Markings	X1-X2-X3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-1
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE
3KVA 200 VOLTS TO 120 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------