



**1000KVA 440 VOLTS TO 416 VOLTS  
THREE PHASE AUTOTRANSFORMER**



# 1000KVA 440 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER


**\$7,552.40 CAD**

Three Phase Autotransformer with a capacity of 1000kVA, transforming 440Y Volts to 416Y Volts

**SKU:** RA1000H2-G

**Categories:** Autotransformer

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

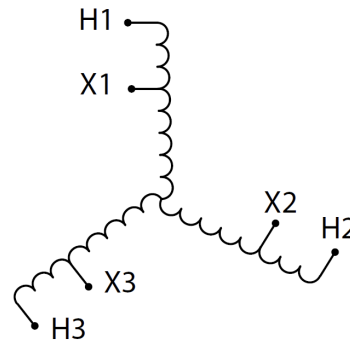

Three Phase Autotransformer with a capacity of 1000kVA, transforming 440Y Volts to 416Y Volts



## PRODUCT SPECIFICATIONS

|                            |  |
|----------------------------|--|
| Weight                     | 334 lbs  |
| Phases                     | <a href="#">3</a>  |
| kVA                        | <a href="#">1000</a>   |
| Connection                 | <a href="#">3PhA-NT-1</a>  |
| Primary Voltage            | <a href="#">440</a>  |
| Primary Max Current        | <a href="#">1312.2A</a>  |
| Primary Markings           | <a href="#">H1-H2-H3</a>   |
| Primary Terminals          | <a href="#">Pads</a>   |
| Secondary Voltage          | <a href="#">416</a>  |
| Secondary Max Current      | <a href="#">1387.9A</a>  |
| Secondary Markings         | <a href="#">X1-X2-X3</a>   |
| Secondary Terminals        | <a href="#">Pads</a>   |
| Primary Taps               | <a href="#">N/A</a>  |
| Conductor Material         | <a href="#">Aluminum</a>   |
| Insulation Class           | <a href="#">220°C (Class H)</a>  |
| BIL (Insulation) Level     | <a href="#">10kV</a>   |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>  |
| Impedance Range            | <a href="#">0.5 – 1.5%</a>   |
| Sound (db)                 | <a href="#">55</a>   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>   |
| Enclosure Size             | <a href="#">E3R-7</a>  |
| Finish/Colour              | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>   |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE

1000KVA 440 VOLTS TO 416 VOLTS  
THREE PHASE AUTOTRANSFORMER



|                      |                            |
|----------------------|----------------------------|
| Country/Manufacturer | <a href="#">Canada/RPM</a> |
|----------------------|----------------------------|