


OFFICIAL QUOTE

15KVA 120 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



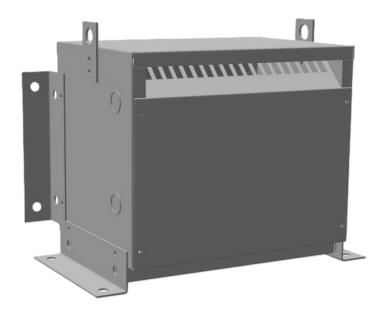

15KVA 120 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,040.00 CAD

Three Phase Autotransformer with a capacity of 15kVA, transforming 120Y Volts to 200Y Volts

SKU: RC15A-B1

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 15kVA, transforming 120Y Volts to 200Y Volts



OFFICIAL QUOTE



15KVA 120 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	42 lbs
Phases	<u>3</u>
kVA	<u>15</u>
Connection	3PhA-NT-1
Primary Voltage	120
Primary Max Current	72.2A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	200
Secondary Max Current	<u>43.3A</u>
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 - 3.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

15KVA 120 VOLTS TO 200 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------