




OFFICIAL QUOTE

2000KVA 120 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER

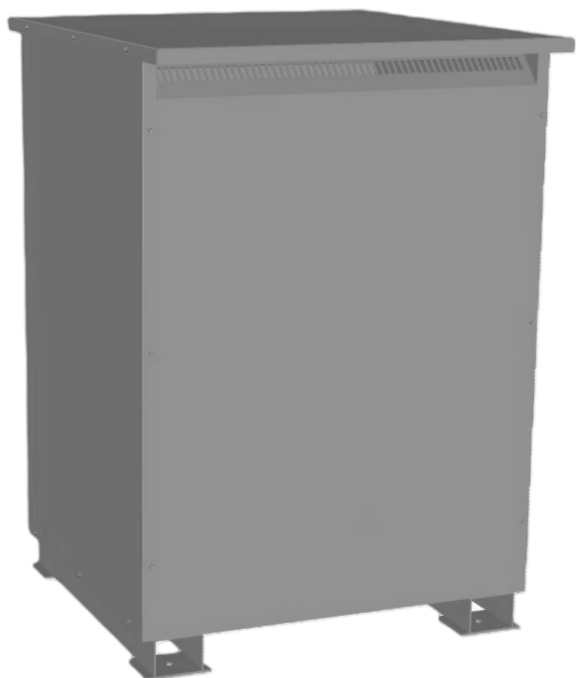

2000KVA 120 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER



\$22,541.10 CAD

Three Phase Autotransformer with a capacity of 2000kVA, transforming 120Y Volts to 110Y Volts

SKU: RA2000A-A2

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

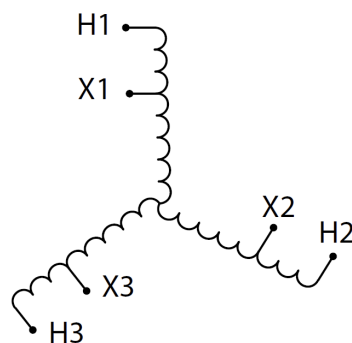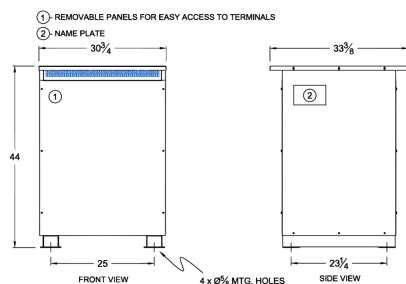

Three Phase Autotransformer with a capacity of 2000kVA, transforming 120Y Volts to 110Y Volts



OFFICIAL QUOTE

2000KVA 120 VOLTS TO 110 VOLTS
THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	1098 lbs
Phases	3
kVA	2000
Connection	3PhA-NT-1
Primary Voltage	120
Primary Max Current	9622.5A
Primary Markings	H1-H2-H3
Primary Terminals	Pads
Secondary Voltage	110
Secondary Max Current	10497.3A
Secondary Markings	X1-X2-X3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

2000KVA 120 VOLTS TO 110 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)