



## 1000VA 120/240 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER

~~369.35 USD~~ 350.88 USD



Single Phase Control Transformer with a capacity of 1000VA, transforming 120/240 Volts to 240/480 Volts

SKU: CS1000K-L

Categories: [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions				Mounting Slot
	A	B	C	F	
25	3	3	2.5	2.5	3.33 0.25 x 0.025
50	3	3	2.5	2.5	3.33 0.25 x 0.025
100	3	4	2.5	2.5	3.75 0.25 x 0.025
150	3.75	4.25	3.33	3.25	3.5 0.25 x 0.025
200	3.75	4.5	3.33	3.25	3.5 0.25 x 0.025
250	3.75	5	3.33	3.25	3.5 0.31 x 0.025
300	4.5	5	3.75	3.75	4.25 0.31 x 0.025
400	5.25	5	4.38	4.5	4.75 0.31 x 0.025
500	5.25	5.5	4.38	4.5	4.75 0.31 x 0.025
750	5.25	6.5	4.38	4.5	4.75 0.31 x 0.025
1000	5.25	7.5	4.38	4.5	4.75 0.31 x 0.025
1500	6.75	7.25	5.63	5	5.75 0.31 x 0.025
2000	7.5	7.5	6.25	6	4.25 0.31 x 0.025
3000	7.5	8.75	6.25	6	5.5 0.31 x 0.025
5000	9	10	8	7	8 0.44 x 0.025

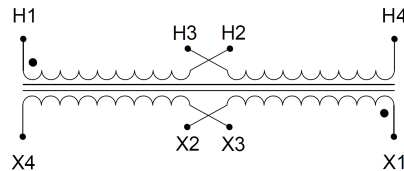

Single Phase Control Transformer with a capacity of 1000VA, transforming 120/240 Volts to 240/480 Volts



## PRODUCT SPECIFICATIONS

Weight	50 lbs
Phases	<a href="#">1</a>
Connection	<a href="#">1Ph-CT-DD-SU</a>
Primary Voltage	<a href="#">120/240</a>
Primary Max Current	<a href="#">8.33A</a>
Primary Markings	<a href="#">X1-X2-X3-X4</a>
Primary Terminals	<a href="#">Terminals</a>
Secondary Voltage	<a href="#">240/480</a>
Secondary Max Current	<a href="#">4.17A</a>
Secondary Markings	<a href="#">H1-H2-H3-H4</a>
Secondary Terminals	<a href="#">Terminals</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
Temperatue Rise	<a href="#">115°C</a>
Insuation Class	<a href="#">180°C (Class F)</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">5.0 – 7.0%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">Core &amp; Coil</a>
Enclosure Size	<a href="#">See Core &amp; Coil Chart</a>
Finish/Colour	<a href="#">N/A</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE



1000VA 120/240 VOLTS TO 240/480  
VOLTS SINGLE PHASE CONTROL  
TRANSFORMER

VA	<a href="#">1000</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>