

200VA 600 VOLTS TO 240/480 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



200VA 600 VOLTS TO  
240/480 VOLTS SINGLE  
PHASE CONTROL  
TRANSFORMER

**\$174.72 CAD**



Single Phase Control Transformer with a capacity of 200VA, transforming 600 Volts to 240/480 Volts

SKU: CS200J-L

Categories: [Control Transformers](#)

**SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**

VA Rating	A	B	C	Mounting Centre D, E	F	Mounting Slot
25	3	3	2.5	2.5	3.33	0.25 x 0.625
50	3	3	2.5	2.5	3.33	0.25 x 0.625
100	3	4	2.5	2.5	3.33	0.25 x 0.625
150	3.75	4.25	3.33	3.25	3.5	0.25 x 0.625
200	3.75	4.5	3.33	3.25	3.5	0.25 x 0.625
250	3.75	5	3.33	3.25	3.5	0.31 x 0.625
350	4.5	5	3.75	3.75	4.75	0.31 x 0.625
500	5.25	5	4.38	4.5	5.75	0.31 x 0.625
750	5.25	5.5	4.38	4.5	5.75	0.31 x 0.625
1000	5.25	6.5	4.38	4.5	5.75	0.31 x 0.625
1500	6.75	7.25	5.63	5	5.75	0.31 x 0.625
2000	7.5	7.5	6.25	6	4.25	0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	0.31 x 0.625
5000	9	10	6	7	6	0.44 x 0.625

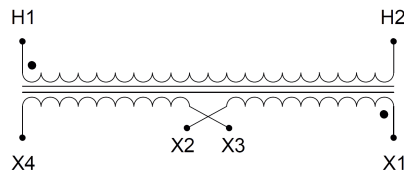

Single Phase Control Transformer with a capacity of 200VA, transforming 600 Volts to 240/480 Volts

200VA 600 VOLTS TO 240/480 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



PRODUCT SPECIFICATIONS

<b>Weight</b>	8 lbs
<b>Phases</b>	<a href="#">1</a>
<b>Connection</b>	<a href="#">1Ph-CT-SD-SD</a>
<b>Primary Voltage</b>	<a href="#">600</a>
<b>Primary Max Current</b>	<a href="#">0.33A</a>
<b>Primary Markings</b>	<a href="#">H1-H2</a>
<b>Primary Terminals</b>	<a href="#">Terminals</a>
<b>Secondary Voltage</b>	<a href="#">240/480</a>
<b>Secondary Max Current</b>	<a href="#">0.83A</a>
<b>Secondary Markings</b>	<a href="#">X1-X2-X3-X4</a>
<b>Secondary Terminals</b>	<a href="#">Terminals</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Temperatue Rise</b>	<a href="#">80°C</a>
<b>Insuation Class</b>	<a href="#">130°C (Class B)</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">5.0 – 7.0%</a>
<b>Sound (db)</b>	<a href="#">40</a>
<b>Enclosure Type</b>	<a href="#">Core &amp; Coil</a>
<b>Enclosure Size</b>	<a href="#">See Core &amp; Coil Chart</a>
<b>Finish/Colour</b>	<a href="#">N/A</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

200VA 600 VOLTS TO 240/480 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



VA	<a href="#">200</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>