

10KVA 240 VOLTS TO 400 VOLTS SINGLE PHASE AUTOTRANSFORMER



\$1,296.30 CAD

Single Phase Autotransformer with a capacity of 10kVA, transforming 240 Volts to 400 Volts

SKU: MC10C-G1

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

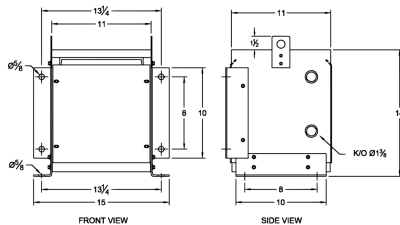

Single Phase Autotransformer with a capacity of 10kVA, transforming 240 Volts to 400 Volts



PRODUCT SPECIFICATIONS

| | |
|----------------------------|--|
| Weight | 76.5 lbs |
| Phases | 1 |
| kVA | 10 |
| Connection | 1PhA-NT-1 |
| Primary Voltage | 240 |
| Primary Max Current | 24.1A |
| Primary Markings | X0-X1 |
| Primary Terminals | Terminal Blocks |
| Secondary Voltage | 400 |
| Secondary Max Current | 14.4A |
| Secondary Markings | H0-H1 |
| Secondary Terminals | Terminal Blocks |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 1.0 – 3.0% |
| Sound (db) | 40 dB |
| Enclosure Type | NEMA 1 |
| Enclosure Size | E1-2 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE
10KVA 240 VOLTS TO 400 VOLTS
SINGLE PHASE AUTOTRANSFORMER



| | |
|----------------------|----------------------------|
| Country/Manufacturer | Canada/RPM |
|----------------------|----------------------------|