




## OFFICIAL QUOTE

### 150KVA 115 VOLTS TO 600 VOLTS SINGLE PHASE AUTOTRANSFORMER

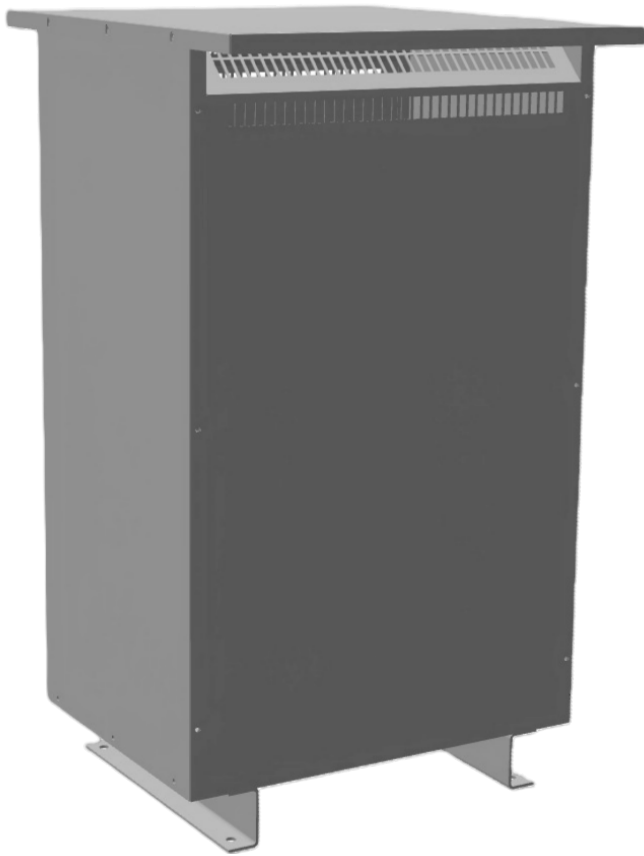

## 150KVA 115 VOLTS TO 600 VOLTS SINGLE PHASE AUTOTRANSFORMER



**\$12,642.20 CAD**

Single Phase Autotransformer with a capacity of  
150kVA, transforming 115 Volts to 600 Volts

**SKU:** MC150A1-J

**Categories:** [Autotransformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

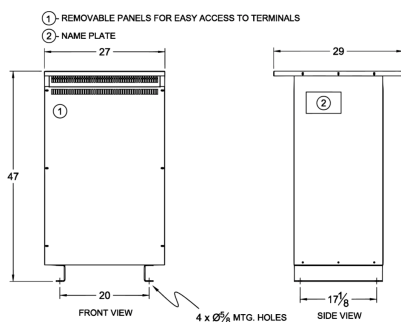

Single Phase Autotransformer with a capacity of 150kVA, transforming 115 Volts to 600 Volts



## OFFICIAL QUOTE

150KVA 115 VOLTS TO 600 VOLTS  
SINGLE PHASE AUTOTRANSFORMER

## PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 933.6 lbs                                                                                            |
| Phases                     | <a href="#">1</a>                                                                                    |
| kVA                        | <a href="#">150</a>                                                                                  |
| Connection                 | <a href="#">1PhA-NT-1</a>                                                                            |
| Primary Voltage            | <a href="#">115</a>                                                                                  |
| Primary Max Current        | <a href="#">753.1A</a>                                                                               |
| Primary Markings           | <a href="#">X0-X1</a>                                                                                |
| Primary Terminals          | <a href="#">Pads</a>                                                                                 |
| Secondary Voltage          | <a href="#">600</a>                                                                                  |
| Secondary Max Current      | <a href="#">144.3A</a>                                                                               |
| Secondary Markings         | <a href="#">H0-H1</a>                                                                                |
| Secondary Terminals        | <a href="#">300MCM-6</a>                                                                             |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Insulation Class           | <a href="#">220°C (Class H)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">2.5 – 4.5%</a>                                                                           |
| Sound (db)                 | <a href="#">55 dB</a>                                                                                |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>                                                                       |
| Enclosure Size             | <a href="#">E3R-8S</a>                                                                               |
| Finish/Colour              | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>                                             |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |



## OFFICIAL QUOTE

**150KVA 115 VOLTS TO 600 VOLTS  
SINGLE PHASE AUTOTRANSFORMER**



|                             |                            |
|-----------------------------|----------------------------|
| <b>Country/Manufacturer</b> | <a href="#">Canada/RPM</a> |
|-----------------------------|----------------------------|