



OFFICIAL QUOTE



300KVA 600 VOLTS TO 347 VOLTS
THREE PHASE AUTOTRANSFORMER



300KVA 600 VOLTS TO 347
VOLTS THREE PHASE
AUTOTRANSFORMER



\$9,584.20 CAD

Three Phase Autotransformer with a capacity of 300kVA, transforming 600Y Volts to 347Y Volts

SKU: RA300J-E

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

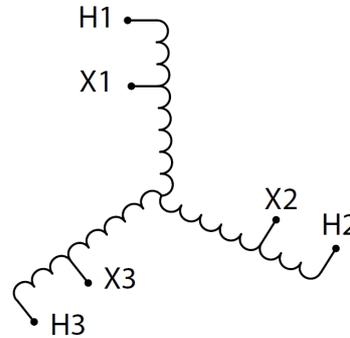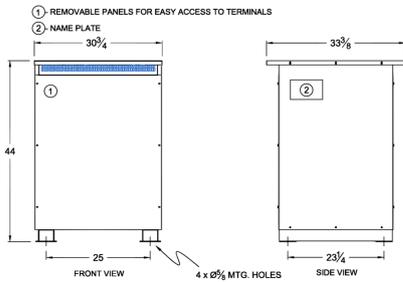

Three Phase Autotransformer with a capacity of 300kVA, transforming 600Y Volts to 347Y Volts



OFFICIAL QUOTE

300KVA 600 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	880 lbs
Phases	3
kVA	300
Connection	3PhA-NT-1
Primary Voltage	600
Primary Max Current	288.7A
Primary Markings	H1-H2-H3
Primary Terminals	Pads
Secondary Voltage	347
Secondary Max Current	499.2A
Secondary Markings	X1-X2-X3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 – 3.5%
Sound (db)	55
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**300KVA 600 VOLTS TO 347 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer

[Canada/RPM](#)