


OFFICIAL QUOTE

30KVA 110 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER



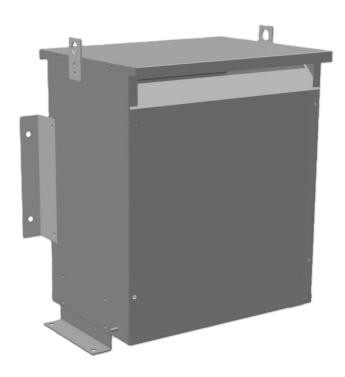

30KVA 110 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER

\$2,627.90 CAD

Three Phase Autotransformer with a capacity of 30kVA, transforming 110Y Volts to 240Y Volts

SKU: RC30A2-C

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 30kVA, transforming 110Y Volts to 240Y Volts



OFFICIAL QUOTE



30KVA 110 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	133 lbs
Phases	<u>3</u>
kVA	30
Connection	<u>3PhA-NT-1</u>
Primary Voltage	110
Primary Max Current	157.5A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>300MCM-6</u>
Secondary Voltage	240
Secondary Max Current	72.2A
Secondary Markings	H1-H2-H3
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-5</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

30KVA 110 VOLTS TO 240 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------