


OFFICIAL QUOTE

30KVA 230 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



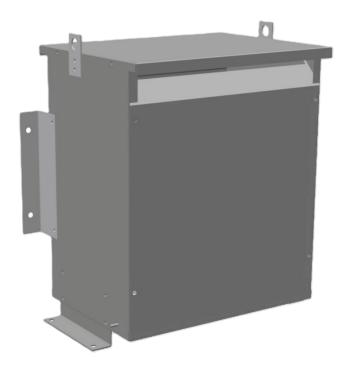

30KVA 230 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER

\$2,686.20 CAD

Three Phase Autotransformer with a capacity of 30kVA, transforming 230Y Volts to 600Y Volts

SKU: RA30C1-J

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 30kVA, transforming 230Y Volts to 600Y Volts



OFFICIAL QUOTE



30KVA 230 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	116 lbs
Phases	<u>3</u>
kVA	30
Connection	<u>3PhA-NT-1</u>
Primary Voltage	230
Primary Max Current	75.3A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2/0-6 AWG
Secondary Voltage	600
Secondary Max Current	28.9A
Secondary Markings	H1-H2-H3
Secondary Terminals	<u>Terminal Blocks</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-5</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

30KVA 230 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------