


#### **OFFICIAL QUOTE**

### 30KVA 277 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



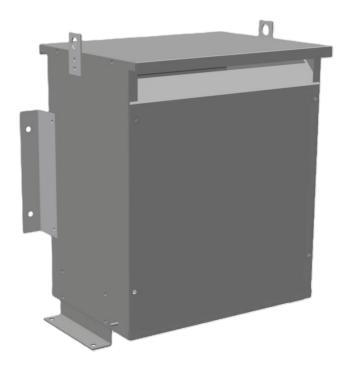

### 30KVA 277 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER

\$2,454.50 CAD

Three Phase Autotransformer with a capacity of 30kVA, transforming 277Y Volts to 600Y Volts

SKU: RA30D-J

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 30kVA, transforming 277Y Volts to 600Y Volts



#### **OFFICIAL QUOTE**



## 30KVA 277 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER

#### **PRODUCT SPECIFICATIONS**

PRODUCT SPECIFICATIONS	
Weight	99 lbs
Phases	<u>3</u>
kVA	30
Connection	3PhA-NT-1
Primary Voltage	120/240
Primary Max Current	62.5A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2-14 AWG
Secondary Voltage	600
Secondary Max Current	28.9A
Secondary Markings	H1-H2-H3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 – 3.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-5</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



#### **OFFICIAL QUOTE**

# 30KVA 277 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------