




OFFICIAL QUOTE

30KVA 480 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER

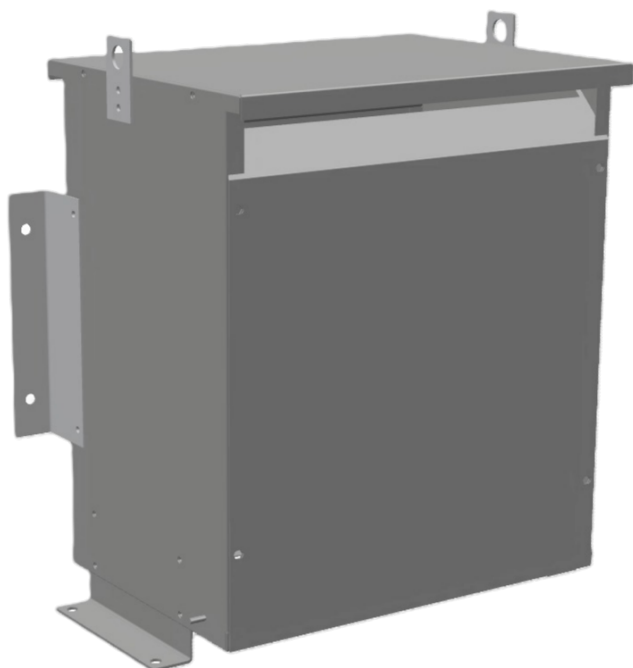

30KVA 480 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



\$2,708.20 CAD

Three Phase Autotransformer with a capacity of 30kVA, transforming 480Y Volts to 208Y Volts

SKU: RC30H-B

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

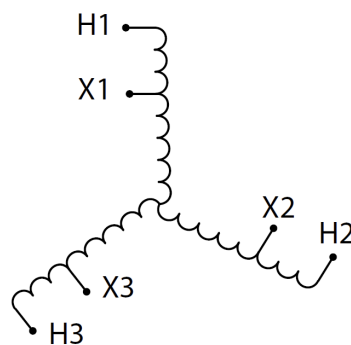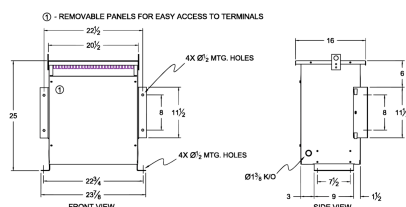

Three Phase Autotransformer with a capacity of 30kVA, transforming 480Y Volts to 208Y Volts



OFFICIAL QUOTE

30KVA 480 VOLTS TO 208 VOLTS
THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	140 lbs
Phases	3
kVA	30
Connection	3PhA-NT-1
Primary Voltage	480
Primary Max Current	36.1A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	208
Secondary Max Current	83.3A
Secondary Markings	X1-X2-X3
Secondary Terminals	#2/0-6 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 – 3.5%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-5
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**30KVA 480 VOLTS TO 208 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer	Canada/RPM
-----------------------------	----------------------------