


#### **OFFICIAL QUOTE**

## 30KVA 600 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



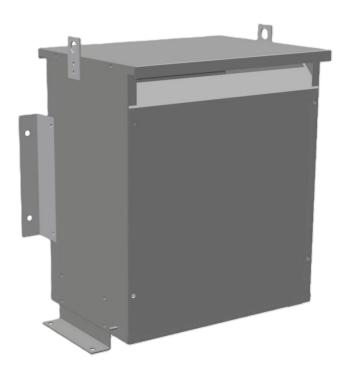

### 30KVA 600 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER

\$2,455.80 CAD

Three Phase Autotransformer with a capacity of 30kVA, transforming 600Y Volts to 277Y Volts

SKU: RA30J-D

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 30kVA, transforming 600Y Volts to 277Y Volts



### **OFFICIAL QUOTE**



# 30KVA 600 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	99 lbs
Phases	3
kVA	<u>30</u>
Connection	3PhA-NT-1
Primary Voltage	600
Primary Max Current	28.9A
Primary Markings	H1-H2-H3
Primary Terminals	Terminal Blocks
Secondary Voltage	<u>277</u>
Secondary Max Current	62.5A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-5
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



### **OFFICIAL QUOTE**

# 30KVA 600 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------