


OFFICIAL QUOTE

3KVA 200 VOLTS TO 400 VOLTS SINGLE PHASE AUTOTRANSFORMER



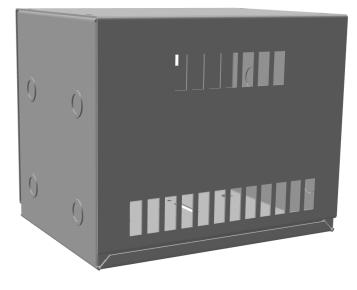

3KVA 200 VOLTS TO 400 VOLTS SINGLE PHASE AUTOTRANSFORMER

\$807.80 CAD

Single Phase Autotransformer with a capacity of 3kVA, transforming 200 Volts to 400 Volts

SKU: MC3B1-G1 Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



	·····	
H0 / X0	X1	H1

Single Phase Autotransformer with a capacity of 3kVA, transforming 200 Volts to 400 Volts



OFFICIAL QUOTE

3KVA 200 VOLTS TO 400 VOLTS SINGLE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	57.6 lbs
Phases	1
kVA	3
Connection	<u>1PhA-NT-1</u>
Primary Voltage	200
Primary Max Current	<u>8.7A</u>
Primary Markings	<u>X0-X1</u>
Primary Terminals	Terminal Blocks
Secondary Voltage	<u>400</u>
Secondary Max Current	<u>4.3A</u>
Secondary Markings	<u>H0-H1</u>
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	<u>Copper</u>
Insulation Class	<u>180°C (Class F)</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	<u>N/A</u>
Impedance Range	<u>1.5 – 3.5%</u>
Sound (db)	<u>40 dB</u>
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-0</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	<u>CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015</u> <u>Registered</u>



OFFICIAL QUOTE

3KVA 200 VOLTS TO 400 VOLTS SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

Canada/RPM