




OFFICIAL QUOTE

3KVA 600 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER

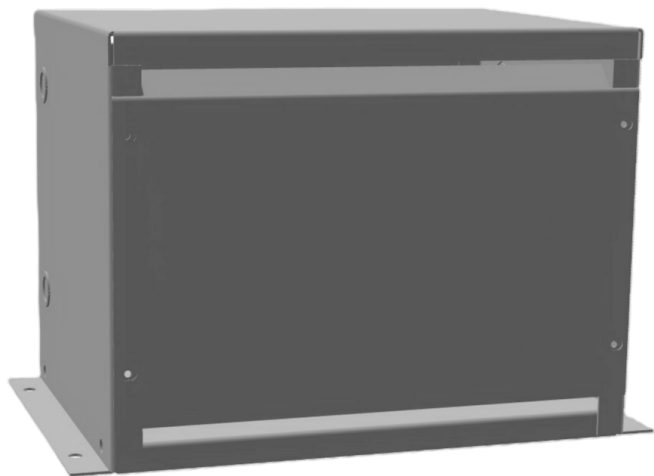

3KVA 600 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER



\$1,093.50 CAD

Three Phase Autotransformer with a capacity of
3kVA, transforming 600Y Volts to 380Y Volts

SKU: RC3J-F

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

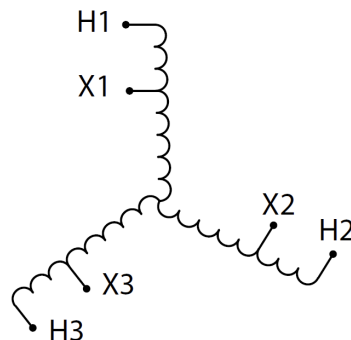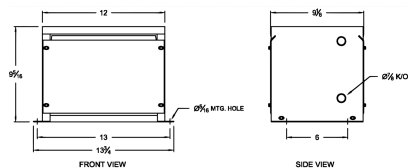

Three Phase Autotransformer with a capacity of 3kVA, transforming 600Y Volts to 380Y Volts



OFFICIAL QUOTE

3KVA 600 VOLTS TO 380 VOLTS
THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	20 lbs
Phases	3
kVA	3
Connection	3PhA-NT-1
Primary Voltage	600
Primary Max Current	2.9A
Primary Markings	H1-H2-H3
Primary Terminals	Terminal Blocks
Secondary Voltage	380
Secondary Max Current	4.6A
Secondary Markings	X1-X2-X3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-1
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

3KVA 600 VOLTS TO 380 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)