



## OFFICIAL QUOTE

### 600KVA 550 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



## 600KVA 550 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER


**\$4,943.90 CAD**

Three Phase Autotransformer with a capacity of 600kVA, transforming 550Y Volts to 575Y Volts

**SKU:** RA600J2-J1

**Categories:** [Autotransformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

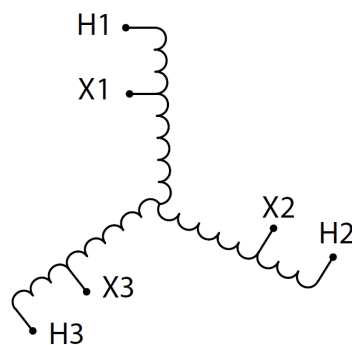

Three Phase Autotransformer with a capacity of 600kVA, transforming 550Y Volts to 575Y Volts



## OFFICIAL QUOTE

600KVA 550 VOLTS TO 575 VOLTS  
THREE PHASE AUTOTRANSFORMER

## PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 143 lbs                                                                                              |
| Phases                     | <a href="#">3</a>                                                                                    |
| kVA                        | <a href="#">600</a>                                                                                  |
| Connection                 | <a href="#">3PhA-NT-1</a>                                                                            |
| Primary Voltage            | <a href="#">550</a>                                                                                  |
| Primary Max Current        | <a href="#">629.8A</a>                                                                               |
| Primary Markings           | <a href="#">X1-X2-X3</a>                                                                             |
| Primary Terminals          | <a href="#">Pads</a>                                                                                 |
| Secondary Voltage          | <a href="#">575</a>                                                                                  |
| Secondary Max Current      | <a href="#">602.5A</a>                                                                               |
| Secondary Markings         | <a href="#">H1-H2-H3</a>                                                                             |
| Secondary Terminals        | <a href="#">Pads</a>                                                                                 |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Aluminum</a>                                                                             |
| Insulation Class           | <a href="#">220°C (Class H)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">0.5 – 1.5%</a>                                                                           |
| Sound (db)                 | <a href="#">45</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>                                                                       |
| Enclosure Size             | <a href="#">E3R-6</a>                                                                                |
| Finish/Colour              | <a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>                                             |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |



## OFFICIAL QUOTE

**600KVA 550 VOLTS TO 575 VOLTS  
THREE PHASE AUTOTRANSFORMER**



|                             |                            |
|-----------------------------|----------------------------|
| <b>Country/Manufacturer</b> | <a href="#">Canada/RPM</a> |
|-----------------------------|----------------------------|