


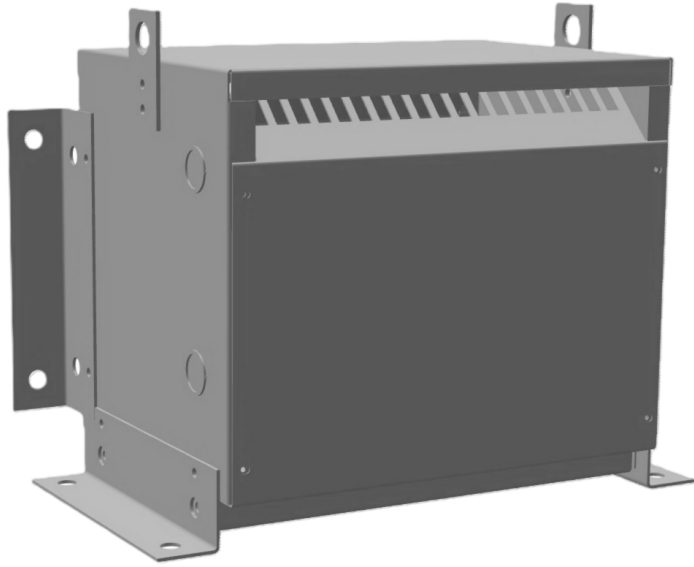

6KVA 110 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



\$1,689.40 CAD

Three Phase Autotransformer with a capacity of 6kVA, transforming 110Y Volts to 400Y Volts

SKU: RC6A2-G1

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

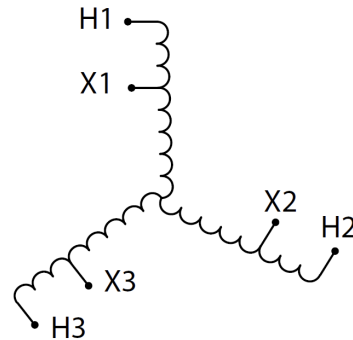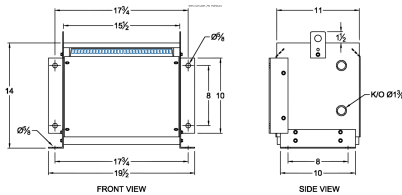

Three Phase Autotransformer with a capacity of 6kVA, transforming 110Y Volts to 400Y Volts



PRODUCT SPECIFICATIONS

Weight	30 lbs
Phases	3
kVA	6
Connection	3PhA-NT-1
Primary Voltage	110
Primary Max Current	31.5A
Primary Markings	X1-X2-X3
Primary Terminals	Terminal Blocks
Secondary Voltage	400
Secondary Max Current	8.7A
Secondary Markings	H1-H2-H3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 – 4.5%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-3
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

6KVA 110 VOLTS TO 400 VOLTS

THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------