


OFFICIAL QUOTE

6KVA 120 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



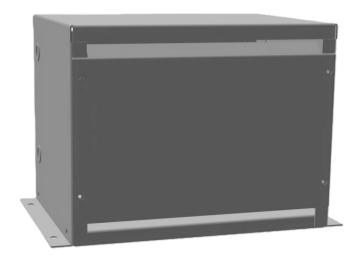

6KVA 120 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,487.70 CAD


Three Phase Autotransformer with a capacity of 6kVA, transforming 120Y Volts to 277Y Volts

SKU: RC6A-D

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 6kVA, transforming 120Y Volts to 277Y Volts



OFFICIAL QUOTE



6KVA 120 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	22 lbs
Phases	<u>3</u>
kVA	<u>6</u>
Connection	3PhA-NT-1
Primary Voltage	120
Primary Max Current	28.9A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	Terminal Blocks
Secondary Voltage	277
Secondary Max Current	12.5A
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	<u>Terminal Blocks</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-1</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

6KVA 120 VOLTS TO 277 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------