


OFFICIAL QUOTE

6KVA 120 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



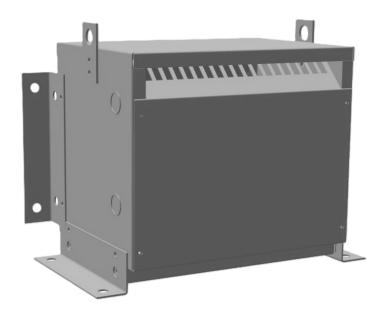

6KVA 120 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,303.05 USD

Three Phase Autotransformer with a capacity of 6kVA, transforming 120Y Volts to 600Y Volts

SKU: RC6A-J

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 6kVA, transforming 120Y Volts to 600Y Volts



OFFICIAL QUOTE

TS OF THE PROPERTY OF THE PROP

6KVA 120 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	32 lbs
Phases	<u>3</u>
kVA	<u>6</u>
Connection	3PhA-NT-1
Primary Voltage	120
Primary Max Current	28.9A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	Terminal Blocks
Secondary Voltage	600
Secondary Max Current	<u>5.8A</u>
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 - 4.5%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

6KVA 120 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------