




OFFICIAL QUOTE

6KVA 200 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER

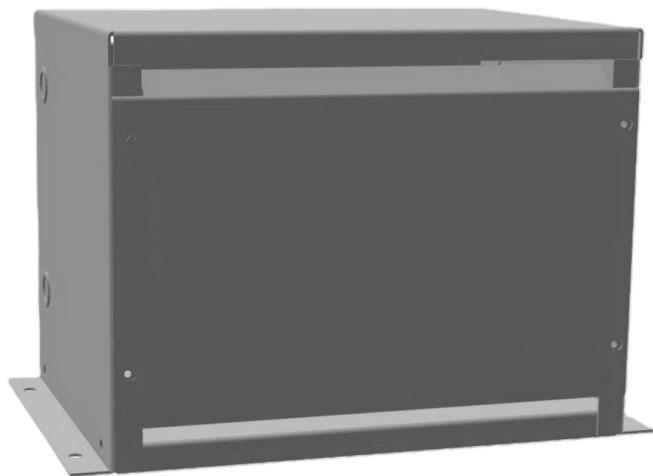

6KVA 200 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



\$1,483.40 CAD

Three Phase Autotransformer with a capacity of 6kVA, transforming 200Y Volts to 120Y Volts

SKU: RC6B1-A

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

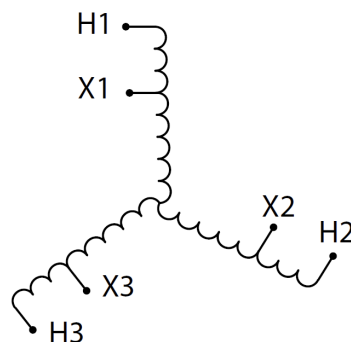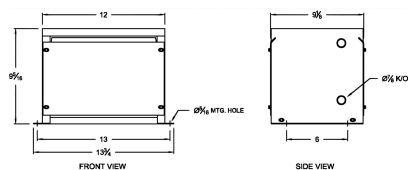

Three Phase Autotransformer with a capacity of 6kVA, transforming 200Y Volts to 120Y Volts



OFFICIAL QUOTE

6KVA 200 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	20 lbs
Phases	3
kVA	6
Connection	3PhA-NT-1
Primary Voltage	200
Primary Max Current	17.3A
Primary Markings	H1-H2-H3
Primary Terminals	Terminal Blocks
Secondary Voltage	120
Secondary Max Current	28.9A
Secondary Markings	X1-X2-X3
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	E1-1
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

6KVA 200 VOLTS TO 120 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)