


OFFICIAL QUOTE

6KVA 208 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



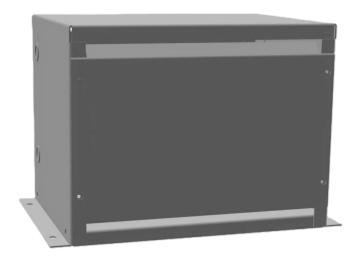

6KVA 208 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER

\$1,578.80 CAD


Three Phase Autotransformer with a capacity of 6kVA, transforming 208Y Volts to 575Y Volts

SKU: RC6B-J1

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 6kVA, transforming 208Y Volts to 575Y Volts



OFFICIAL QUOTE



6KVA 208 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	25 lbs
Phases	<u>3</u>
kVA	<u>6</u>
Connection	3PhA-NT-1
Primary Voltage	208
Primary Max Current	16.7A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	Terminal Blocks
Secondary Voltage	<u>575</u>
Secondary Max Current	<u>6A</u>
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	<u>Terminal Blocks</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-1</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

6KVA 208 VOLTS TO 575 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------