



## 6KVA 220 VOLTS TO 550 VOLTS THREE PHASE AUTOTRANSFORMER


**\$1,530.00 CAD**

Three Phase Autotransformer with a capacity of 6kVA, transforming 220Y Volts to 550Y Volts

SKU: RC6C2-J2

Categories: [Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

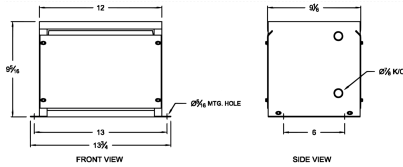

Three Phase Autotransformer with a capacity of 6kVA, transforming 220Y Volts to 550Y Volts



PRODUCT SPECIFICATIONS

<b>Weight</b>	23 lbs
<b>Phases</b>	<a href="#">3</a>
<b>kVA</b>	<a href="#">6</a>
<b>Connection</b>	<a href="#">3PhA-NT-1</a>
<b>Primary Voltage</b>	<a href="#">220</a>
<b>Primary Max Current</b>	<a href="#">15.7A</a>
<b>Primary Markings</b>	<a href="#">X1-X2-X3</a>
<b>Primary Terminals</b>	<a href="#">Terminal Blocks</a>
<b>Secondary Voltage</b>	<a href="#">380</a>
<b>Secondary Max Current</b>	<a href="#">6.3A</a>
<b>Secondary Markings</b>	<a href="#">H1-H2-H3</a>
<b>Secondary Terminals</b>	<a href="#">Terminal Blocks</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Insulation Class</b>	<a href="#">220°C (Class H)</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">1.5 – 3.5%</a>
<b>Sound (db)</b>	<a href="#">40</a>
<b>Enclosure Type</b>	<a href="#">NEMA 1</a>
<b>Enclosure Size</b>	<a href="#">E1-1</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE  
6KVA 220 VOLTS TO 550 VOLTS  
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<a href="#">Canada/RPM</a>
----------------------	----------------------------