


OFFICIAL QUOTE

6KVA 600 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



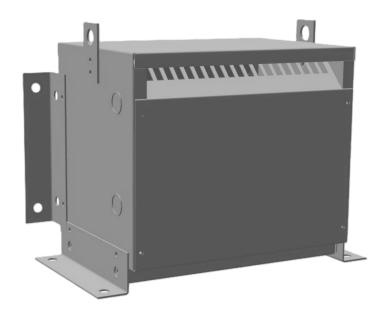

6KVA 600 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER


\$1,785.00 CAD

Three Phase Autotransformer with a capacity of 6kVA, transforming 600Y Volts to 120Y Volts

SKU: RC6J-A

Categories: <u>Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 6kVA, transforming 600Y Volts to 120Y Volts



OFFICIAL QUOTE



6KVA 600 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	32 lbs
Phases	<u>3</u>
kVA	<u>6</u>
Connection	<u>3PhA-NT-1</u>
Primary Voltage	600
Primary Max Current	<u>5.8A</u>
Primary Markings	H1-H2-H3
Primary Terminals	<u>Terminal Blocks</u>
Secondary Voltage	120
Secondary Max Current	28.9A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	Terminal Blocks
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 - 4.5%</u>
Sound (db)	40
Enclosure Type	NEMA 1
Enclosure Size	<u>E1-3</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

6KVA 600 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------