


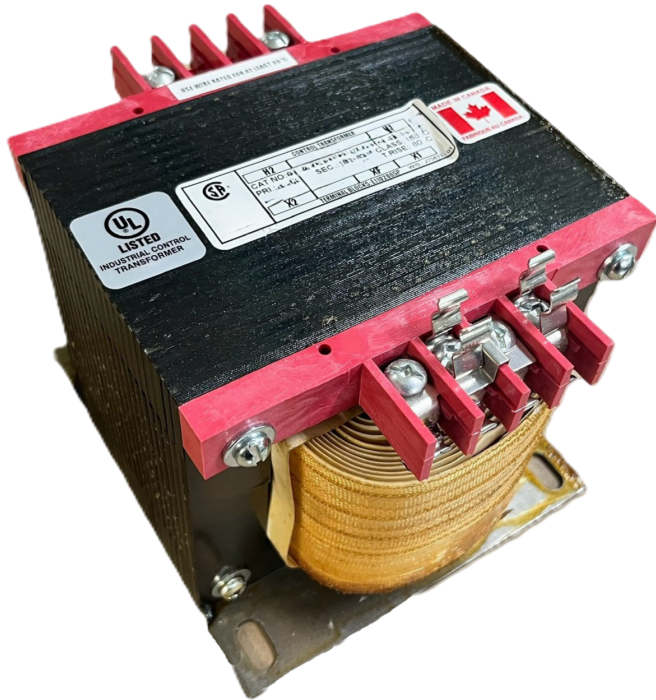

1000VA 208 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$471.38 CAD


Single Phase Control Transformer with a capacity
of 1000VA, transforming 208 Volts to 120/240
Volts

SKU: CS1000B-K

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Control Transformers, Table of Dimensions (inches)						
VA Rating	Overall Dimensions				Mounting Slot	Mounting Hole
	A	B	C	F		
25	3	3	2.5	2.5	3.33	0.25 x 0.625
50	3	3	2.5	2.5	3.33	0.25 x 0.625
100	3	4	2.5	2.5	3.75	0.25 x 0.625
150	3.75	4.25	3.33	3.25	3.5	0.25 x 0.625
200	3.75	4.5	3.33	3.25	3.5	0.25 x 0.625
250	3.75	5	3.33	3.25	3.5	0.31 x 0.625
300	4.5	5	3.75	3.75	4.75	0.31 x 0.625
400	5.25	5	4.38	4.5	5.75	0.31 x 0.625
500	5.25	5.5	4.38	4.5	5.75	0.31 x 0.625
750	5.25	6.5	4.38	4.5	6.75	0.31 x 0.625
1000	5.25	7.5	4.38	4.5	7.75	0.31 x 0.625
1500	6.75	7.25	5.63	5	8.75	0.31 x 0.625
2000	7.5	7.5	6.25	6	9.25	0.31 x 0.625
3000	7.5	8.75	6.25	6	10.5	0.31 x 0.625
5000	9	10	7	7	12	0.44 x 0.625



Single Phase Control Transformer with a capacity of 1000VA, transforming 208 Volts to 120/240 Volts



PRODUCT SPECIFICATIONS

Weight	23 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	208
Primary Max Current	4.81A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	120/240
Secondary Max Current	8.33A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	115°C
Insuation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

1000VA 208 VOLTS TO 120/240
VOLTS SINGLE PHASE CONTROL
TRANSFORMER



VA	1000
Country/Manufacturer	Canada/RPM