


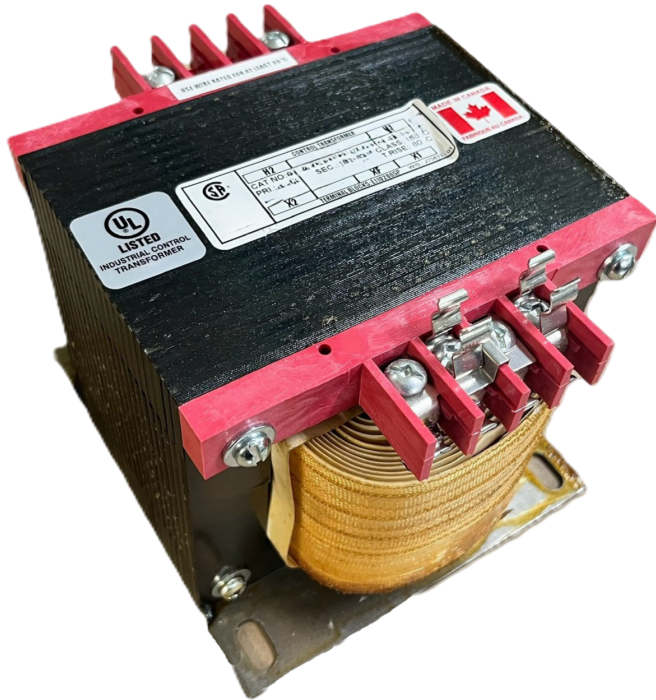

1000VA 347 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$471.38 CAD


Single Phase Control Transformer with a capacity
of 1000VA, transforming 347 Volts to 120/240
Volts

SKU: CS1000E-K

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions				Mounting Slot
	A	B	C	F	
25	3	3	2.5	2.5	3.33 0.25 x 0.025
50	3	3	2.5	2.5	3.33 0.25 x 0.025
100	3	4	2.5	2.5	3.75 0.25 x 0.025
150	3.75	4.25	3.33	3.25	3.5 0.25 x 0.025
200	3.75	4.5	3.33	3.25	3.5 0.25 x 0.025
250	3.75	5	3.33	3.25	3.5 0.31 x 0.025
300	4.5	5	3.75	3.75	4.09 0.31 x 0.025
400	5.25	5	4.38	4.5	4.75 0.31 x 0.025
500	5.25	5.5	4.38	4.5	4.75 0.31 x 0.025
750	5.25	6.5	4.38	4.5	4.75 0.31 x 0.025
1000	5.25	7.5	4.38	4.5	4.75 0.31 x 0.025
1500	6.75	7.25	5.63	5	5.75 0.31 x 0.025
2000	7.5	7.5	6.25	6	4.25 0.31 x 0.025
3000	7.5	8.75	6.25	6	5.5 0.31 x 0.025
5000	9	10	8	7	8 0.44 x 0.025



Single Phase Control Transformer with a capacity of 1000VA, transforming 347 Volts to 120/240 Volts



PRODUCT SPECIFICATIONS

Weight	23 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	347
Primary Max Current	2.88A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	120/240
Secondary Max Current	8.33A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	115°C
Insuation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

1000VA 347 VOLTS TO 120/240
VOLTS SINGLE PHASE CONTROL
TRANSFORMER



VA	1000
Country/Manufacturer	Canada/RPM