



**100VA 480 VOLTS TO 240/480 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER**



100VA 480 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$95.66 USD



Single Phase Control Transformer with a capacity of 100VA, transforming 480 Volts to 240/480 Volts

SKU: CS100H-L

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VS Rating	Overall Dimensions				Mounting Base	Mounting Stud
	A	B	C	D		
25	3	3	2.5	2.5	3.3	0.25 x 0.625
50	3	3	2.5	2.5	3.3	0.25 x 0.625
100	3	4	2.5	2.5	3.3	0.25 x 0.625
150	3.75	4.25	3.13	3.25	3.5	0.25 x 0.625
200	3.75	4.5	3.13	3.25	3.5	0.25 x 0.625
250	3.75	5	3.13	3.25	3.5	0.31 x 0.625
350	4.5	5	3.75	3.75	3.75	0.31 x 0.625
500	5.25	5	4.38	4.5	3.75	0.31 x 0.625
750	5.25	5.5	4.38	4.5	3.75	0.31 x 0.625
1000	5.25	6.5	4.38	4.5	4.75	0.31 x 0.625
1500	6.75	7.25	5	5	5.75	0.31 x 0.625
2000	7.5	8	5.625	6	6.25	0.31 x 0.625
2500	7.5	8.75	6.25	6	6.5	0.31 x 0.625
5000	9	10	8	7	7	0.44 x 0.625

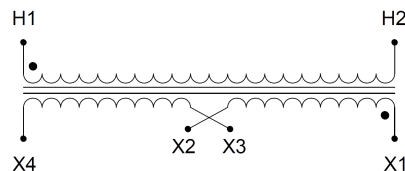

Single Phase Control Transformer with a capacity of 100VA, transforming 480 Volts to 240/480 Volts



PRODUCT SPECIFICATIONS

Weight	18 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	480
Primary Max Current	0.21A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	240/480
Secondary Max Current	0.42A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	80°C
Insuation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE
100VA 480 VOLTS TO 240/480 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



VA	
Country/Manufacturer	Canada/RPM