



# OFFICIAL QUOTE

## 100VA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER



# 100VA 600 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

## \$171.08 CAD


Single Phase Control Transformer with a capacity of 100VA, transforming 600 Volts to 120/240 Volts

**SKU:** CE100J-K

**Categories:** [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	A	B	C	Mounting Dimensions Ø x L	
25	3	6	3.5	1.375	4.375
50	3	6	3.5	1.375	4.375
100	3	6	3.5	1.375	4.375
150	3.5	6.658	3.13	3.25	5
200	3.5	6.658	3.13	3.25	5
250	3.5	6.658	3.13	3.25	5
350	4.125	6.5	3.75	3.75	7.875
500	4.875	7	4.38	4.5	5.5
750	4.875	7	4.38	4.5	5.5
1000	4.875	7	4.38	4.5	5.5
1500	5.625	9	5.63	5	7.25
2000	6.875	9.25	6.25	6	8
3000	6.875	9.25	6.25	6	8
5000	8	10.5	9.5	6	9

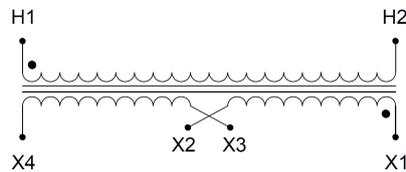

Single Phase Control Transformer with a capacity of 100VA, transforming 600 Volts to 120/240 Volts



**OFFICIAL QUOTE**

**100VA 600 VOLTS TO 120/240 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER**





OFFICIAL QUOTE

100VA 600 VOLTS TO 120/240 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



PRODUCT SPECIFICATIONS

<b>Weight</b>	5 lbs
<b>Phases</b>	<a href="#">1</a>
<b>Connection</b>	<a href="#">1Ph-CT-SD-SD</a>
<b>Primary Voltage</b>	<a href="#">600</a>
<b>Primary Max Current</b>	<a href="#">0.17A</a>
<b>Primary Markings</b>	<a href="#">H1-H2</a>
<b>Primary Terminals</b>	<a href="#">Leads</a>
<b>Secondary Voltage</b>	<a href="#">120/240</a>
<b>Secondary Max Current</b>	<a href="#">0.83A</a>
<b>Secondary Markings</b>	<a href="#">X1-X2-X3-X4</a>
<b>Secondary Terminals</b>	<a href="#">Leads</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Temperatue Rise</b>	<a href="#">80°C</a>
<b>Insuation Class</b>	<a href="#">130°C (Class B)</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">5.0 – 7.0%</a>
<b>Sound (db)</b>	<a href="#">40</a>
<b>Enclosure Type</b>	<a href="#">Type-1 Indoor</a>
<b>Enclosure Size</b>	<a href="#">See Enclosure Chart</a>
<b>Finish/Colour</b>	<a href="#">Semigloss – Black</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

100VA 600 VOLTS TO 120/240 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER



VA	
Country/Manufacturer	<a href="#">Canada/RPM</a>