




OFFICIAL QUOTE

150VA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

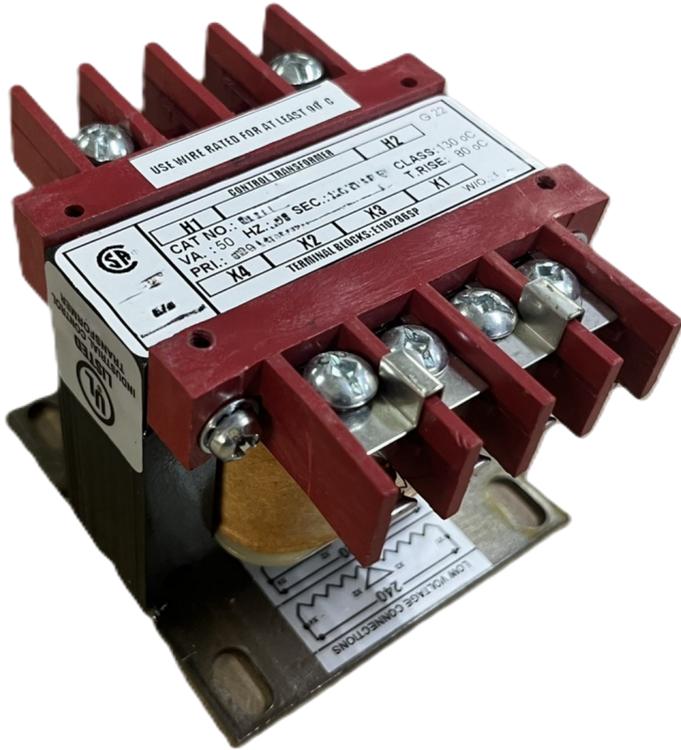

150VA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$156.52 CAD



Single Phase Control Transformer with a capacity of 150VA, transforming 480 Volts to 120/240 Volts

SKU: CS150H-K

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Control Transformers - Table of Dimensions (Inches)						
VA	Overall Dimensions				Mounting Slot	Mounting Slot
	A	B	C	F		
25	3	3	2.5	2.5	3.33	0.25 x 0.625
50	3	3	2.5	2.5	3.33	0.25 x 0.625
100	3	4	2.5	2.5	3.75	0.25 x 0.625
150	3.75	4.25	3.13	3.25	4.5	0.25 x 0.625
200	3.75	4.5	3.13	3.25	4.5	0.25 x 0.625
250	3.75	5	3.13	3.25	4.5	0.31 x 0.625
350	4.5	5	3.75	3.75	4.75	0.31 x 0.625
500	5.25	5	4.38	4.5	4.75	0.31 x 0.625
750	5.25	5.5	4.38	4.5	5.25	0.31 x 0.625
1000	5.25	6.5	4.38	4.5	5.75	0.31 x 0.625
1500	6.75	7.25	5.63	5	5.25	0.31 x 0.625
2000	7.5	7.5	6.25	6	5.25	0.31 x 0.625
3000	7.5	8.75	6.25	6	6.5	0.31 x 0.625
5000	9	10	8	7	8	0.44 x 0.625

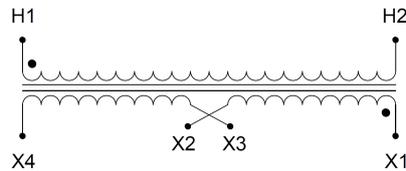

Single Phase Control Transformer with a capacity of 150VA, transforming 480 Volts to 120/240 Volts



OFFICIAL QUOTE

150VA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	18 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	480
Primary Max Current	0.31A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	120/240
Secondary Max Current	1.25A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperature Rise	80°C
Insulation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

150VA 480 VOLTS TO 120/240 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



VA	150
Country/Manufacturer	Canada/RPM