



2000VA 480 VOLTS TO 120 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$469.13 USD



Single Phase Control Transformer with a capacity of 2000VA, transforming 480 Volts to 120 Volts

SKU: CS2000H-A

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Volts	Overall Dimensions	Mounting Dimensions
Rating	A B C D E F	G H I J K L
25	3 3 2.5 2.5 2.5 3.33	0.25 x 0.425
30	3 3 2.5 2.5 2.5 3.33	0.25 x 0.425
100	3 4 2.5 2.5 3 3.75	0.25 x 0.425
150	3.75 4.25 3.33 3.25 3.5 4.5	0.25 x 0.425
200	3.75 4.5 3.33 3.25 3.5 4.5	0.25 x 0.425
250	3.75 5 3.33 3.25 3.5 4.5	0.31 x 0.425
350	4.5 5 3.75 3.75 3.75 4.75	0.31 x 0.425
500	5.25 5 4.38 4.5 3.75 4.75	0.31 x 0.425
750	5.25 5.5 4.38 4.5 3.75 4.75	0.31 x 0.425
1000	5.25 6.5 4.38 4.5 4.75 5.75	0.31 x 0.425
1500	6.75 7.25 5.0 5 3.75 5.25	0.31 x 0.425
2000	7.5 7.5 6.25 6 4.25 5.25	0.31 x 0.425
3000	7.5 8.75 6.25 6 5.5 6.5	0.31 x 0.425
5000	9 10 8 7 7 8	0.44 x 0.425

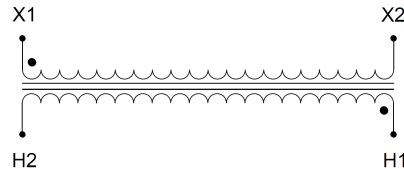

Single Phase Control Transformer with a capacity of 2000VA, transforming 480 Volts to 120 Volts



PRODUCT SPECIFICATIONS

Weight	70 lbs
Phases	1
Connection	1Ph-CT-SS-SU
Primary Voltage	480
Primary Max Current	4.17A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	120
Secondary Max Current	16.67A
Secondary Markings	X1-X2
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	115°C
Insuation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE
2000VA 480 VOLTS TO 120 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



VA	
Country/Manufacturer	Canada/RPM