



**200VA 120/240 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER**



200VA 120/240 VOLTS TO 240/480 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$189.28 CAD


Single Phase Control Transformer with a capacity of 200VA, transforming 120/240 Volts to 240/480 Volts

SKU: CS200K-L

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions					Mounting Centres (D.C.)	Mounting Size
	A	B	C	D	E		
25	3	3	2.5	2.5	2.5	3.13	0.25 x 0.625
50	3	3	2.5	2.5	2.5	3.13	0.25 x 0.625
100	3	4	2.5	2.5	3	3.75	0.25 x 0.625
150	3.75	4.25	3.13	3.25	3.5	4.5	0.25 x 0.625
200	3.75	4.5	3.13	3.25	3.5	4.5	0.25 x 0.625
250	3.75	5	3.13	3.25	3.5	4.5	0.31 x 0.625
350	4.5	5	3.75	3.75	3.75	4.75	0.31 x 0.625
500	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625
750	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625
1000	5.25	5.5	4.38	4.5	3.75	4.75	0.31 x 0.625
1500	6.75	7.25	5.63	5	3.75	5.25	0.31 x 0.625
2000	7.5	7.5	6.25	6	4.25	5.25	0.31 x 0.625
3000	7.5	8.75	6.25	6	5.5	6.5	0.31 x 0.625
5000	9	10	8	7	7	8	0.44 x 0.625

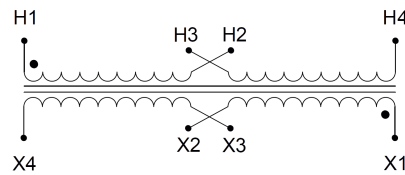

Single Phase Control Transformer with a capacity of 200VA, transforming 120/240 Volts to 240/480 Volts



200VA 120/240 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER

PRODUCT SPECIFICATIONS

Weight	23 lbs
Phases	1
Connection	1Ph-CT-DD-SU
Primary Voltage	120/240
Primary Max Current	1.67A
Primary Markings	X1-X2-X3-X4
Primary Terminals	Terminals
Secondary Voltage	240/480
Secondary Max Current	0.83A
Secondary Markings	H1-H2-H3-H4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperature Rise	80°C
Insulation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE



200VA 120/240 VOLTS TO 240/480
VOLTS SINGLE PHASE CONTROL
TRANSFORMER

VA	200
Country/Manufacturer	Canada/RPM