



OFFICIAL QUOTE

200VA 600 VOLTS TO 12/24 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



200VA 600 VOLTS TO
12/24 VOLTS SINGLE
PHASE CONTROL
TRANSFORMER

\$216.58 CAD


Single Phase Control Transformer with a capacity of 200VA, transforming 600 Volts to 12/24 Volts

SKU: CE200H-Z

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	A	B	C	Mounting Dimensions Ø x L	
25	3	6	3.5	1.375	4.375
50	3	6	3.5	1.375	4.375
100	3	6	3.5	1.375	4.375
150	3.5	6.658	3.13	3.25	5
200	3.5	6.658	3.13	3.25	5
250	3.5	6.658	3.13	3.25	5
350	4.125	6.5	3.75	3.75	7.875
500	4.875	7	4.38	4.5	5.5
750	4.875	7	4.38	4.5	5.5
1000	4.875	7	4.38	4.5	5.5
1500	5.625	9	5.63	5	7.25
2000	6.875	9.25	6.25	6	8
3000	6.875	9.25	6.25	6	8
5000	8	10.5	9.5	6	9

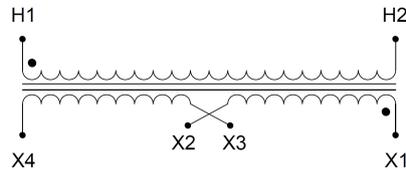

Single Phase Control Transformer with a capacity of 200VA, transforming 600 Volts to 12/24 Volts



OFFICIAL QUOTE

**200VA 600 VOLTS TO 12/24 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER**





OFFICIAL QUOTE

200VA 600 VOLTS TO 12/24 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	8 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	600
Primary Max Current	0.33A
Primary Markings	H1-H2
Primary Terminals	Leads
Secondary Voltage	12/24
Secondary Max Current	16.67A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Leads
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	80°C
Insuation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Type-1 Indoor
Enclosure Size	See Enclosure Chart
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered
VA	200



OFFICIAL QUOTE

200VA 600 VOLTS TO 12/24 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



Country/Manufacturer

[Canada/RPM](#)