




OFFICIAL QUOTE

750VA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

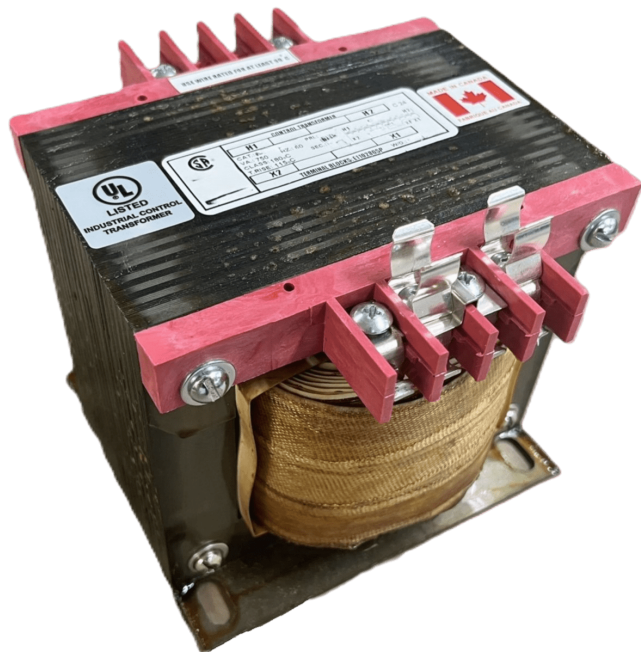

750VA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$420.42 CAD



Single Phase Control Transformer with a capacity of 750VA, transforming 480 Volts to 120/240 Volts

SKU: CS750H-K

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Control Transformers: Table of Dimensions (inches)							
Rating	A	B	C	Mounting Centres D-E	F	Mounting Slot	
25	3	3	2.5	2.5	3.33	0.25 x 0.625	
50	3	3	2.5	2.5	3.33	0.25 x 0.625	
100	3	4	2.5	2.5	3.75	0.25 x 0.625	
150	3.75	4.25	3.33	3.25	3.5	0.25 x 0.625	
200	3.75	4.5	3.33	3.25	3.5	0.25 x 0.625	
250	3.75	5	3.33	3.25	3.5	0.31 x 0.625	
350	4.5	5	3.75	3.75	4.75	0.31 x 0.625	
500	5.25	5	4.38	4.5	5.75	0.31 x 0.625	
750	5.25	5.5	4.38	4.5	5.75	0.31 x 0.625	
1000	5.25	6.5	4.38	4.5	5.75	0.31 x 0.625	
1500	6.75	7.25	5.63	5	7.75	0.31 x 0.625	
2000	7.5	7.5	6.25	6	8.25	0.31 x 0.625	
3000	7.5	8.75	6.25	6	8.5	0.31 x 0.625	
5000	9	10	8	7	8	0.44 x 0.625	

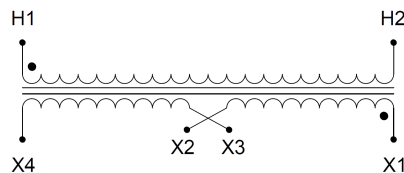

Single Phase Control Transformer with a capacity of 750VA, transforming 480 Volts to 120/240 Volts



OFFICIAL QUOTE

750VA 480 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	50 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	480
Primary Max Current	1.56A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	120/240
Secondary Max Current	6.25A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	115°C
Insuation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

750VA 480 VOLTS TO 120/240 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER

VA

Country/Manufacturer

[Canada/RPM](#)