

## 30KVA 480 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



**\$9,173.00 CAD**

Three Phase Encapsulated Isolation Transformer with a capacity of 30kVA, transforming 480 Volts to 208Y/120 Volts

SKU: BC30H-M/EP

Categories: [Encapsulated Isolation Transformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

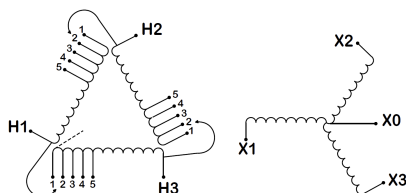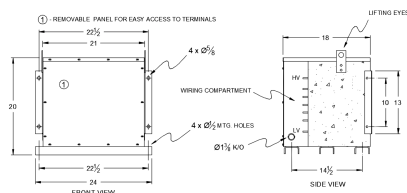

Three Phase Encapsulated Isolation Transformer with a capacity of 30kVA, transforming 480 Volts to 208Y/120 Volts



**30KVA 480 VOLTS TO 208Y/120  
VOLTS THREE PHASE ENCAPSULATED  
ISOLATION TRANSFORMER**

**PRODUCT SPECIFICATIONS**

<b>Weight</b>	520 lbs
<b>Phases</b>	<a href="#">3</a>
<b>kVA</b>	<a href="#">30</a>
<b>Connection</b>	<a href="#">3Ph-DY-5T-SD</a>
<b>Primary Voltage</b>	<a href="#">480</a>
<b>Primary Max Current</b>	<a href="#">36.1A</a>
<b>Primary Markings</b>	<a href="#">H1-H2-3</a>
<b>Primary Terminals</b>	<a href="#">#2-14 AWG</a>
<b>Secondary Voltage</b>	<a href="#">208Y/120</a>
<b>Secondary Max Current</b>	<a href="#">83.3A</a>
<b>Secondary Markings</b>	<a href="#">X0-X1-X2-X3</a>
<b>Secondary Terminals</b>	<a href="#">#2/0-6 AWG</a>
<b>Primary Taps</b>	<a href="#">+/- 2 x 2.5%</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">1.5 – 3.5%</a>
<b>Sound (db)</b>	<a href="#">45</a>
<b>Enclosure Type</b>	<a href="#">NEMA 3R Indoor</a>
<b>Enclosure Size</b>	<a href="#">E3R-3PEP-5</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
<b>Country/Manufacturer</b>	<a href="#">Canada/RPM</a>