



OFFICIAL QUOTE

30HP 380 VOLTS THREE PHASE
MOTOR STARTER



30HP 380 VOLTS THREE
PHASE MOTOR STARTER


\$926.00 CAD

Three Phase Motor Starter with a capacity of
30HP, suitable for 380 Volt Systems

SKU: RS30F

Categories: [Motor Starting Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

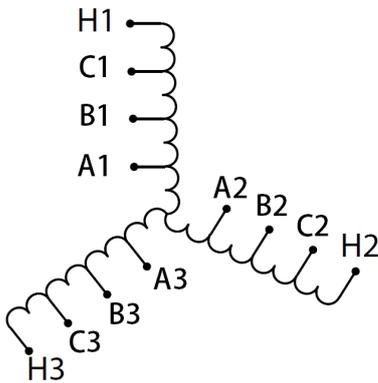

Three Phase Motor Starter with a capacity of 30HP, suitable for 380 Volt Systems



OFFICIAL QUOTE

30HP 380 VOLTS THREE PHASE
MOTOR STARTER



PRODUCT SPECIFICATIONS

Weight	60 lbs
Phases	3
Connection	3PhA-ST-0-2
Primary Voltage	380
Primary Max Current	N/A
Primary Markings	H1-H2-H3
Primary Terminals	Large Scews
Secondary Voltage	65/80/100%
Secondary Max Current	N/A
Secondary Markings	A-B-C
Secondary Terminals	Large Scews
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	115°C
Insuation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	N/A
Sound (db)	N/A
Enclosure Type	Core & Coil
Enclosure Size	N/A (Core & Coil)
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

30HP 380 VOLTS THREE PHASE
MOTOR STARTER



HP	30
Country/Manufacturer	Canada/RPM