RS100J

$976.56 USD

SKU: cf12995275a3
Categories: Motor Starters

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

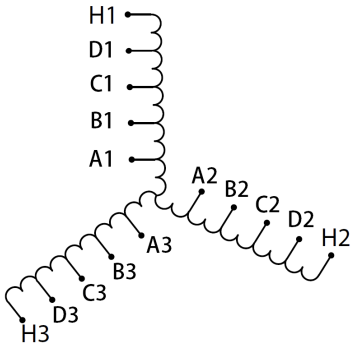

PRODUCT SPECIFICATIONS

Weight	130 lbs
Phases	3
HP	100
Connection	3PhA-ST-0-3
Primary Voltage	600
Primary Max Current	96.2A
Primary Markings	H1-H2-H3

The quote is valid 30 days from 20 April 2025. The price does not include: "Special Features", freight and possible taxes.
Disclosing this information to the third party or other supplier may lead to the cancellation of this quote. All other requests please email to sales@transformersource.ca. Printed: September-16-2024.

Primary Terminals	Pads
Secondary Voltage	50/65/80/100%
Secondary Max Current	1154.7A
Secondary Markings	A-B-C-D
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Insuation Class	220
BIL (Insulation) Level	10kV
Efficiency	N/A
Impedance	N/A
Sound (db)	N/A
Enclosure Type	N/A
Enclosure	Core & Coil