




## RS125G1

**\$2,221.00 CAD**

SKU: b683afb4f414

Categories: [Motor Starters](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

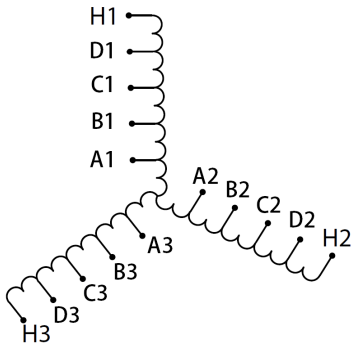

### PRODUCT SPECIFICATIONS

Weight	170 lbs
Phases	<a href="#">3</a>
HP	<a href="#">125</a>
Connection	<a href="#">3PhA-ST-0-3</a>
Primary Voltage	<a href="#">400</a>
Primary Max Current	<a href="#">180.4A</a>



<b>Primary Markings</b>	<a href="#">H1-H2-H3</a>
<b>Primary Terminals</b>	<a href="#">Pads</a>
<b>Secondary Voltage</b>	<a href="#">50/65/80/100%</a>
<b>Secondary Max Current</b>	<a href="#">1443.4A</a>
<b>Secondary Markings</b>	<a href="#">A-B-C-D</a>
<b>Secondary Terminals</b>	<a href="#">Pads</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Temperature Rise</b>	<a href="#">150°C</a>
<b>Insulation Class</b>	<a href="#">220°C</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency</b>	<a href="#">N/A</a>
<b>Impedance</b>	<a href="#">N/A</a>
<b>Sound (db)</b>	<a href="#">N/A</a>
<b>Enclosure Type</b>	<a href="#">Core &amp; Coil</a>
<b>Enclosure</b>	<a href="#">N/A</a>
<b>Finish</b>	<a href="#">N/A</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>