



OFFICIAL QUOTE

1000KVA 220 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



1000KVA 220 VOLTS TO 416 VOLTS THREE PHASE AUTOTRANSFORMER



\$32,563.90 CAD

Three Phase Autotransformer with a capacity of 1000kVA, transforming 220Y Volts to 416Y Volts

SKU: RA1000C2-G

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

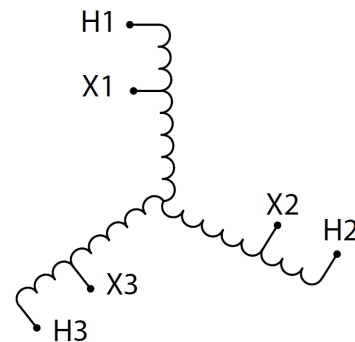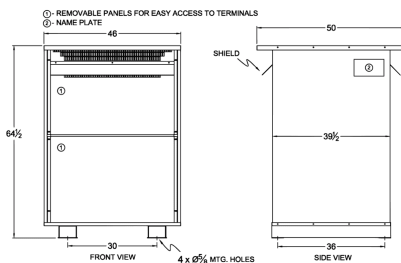

Three Phase Autotransformer with a capacity of 1000kVA, transforming 220Y Volts to 416Y Volts



OFFICIAL QUOTE

1000KVA 220 VOLTS TO 416 VOLTS
THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	3064 lbs
Phases	3
kVA	1000
Connection	3PhA-NT-1
Primary Voltage	220
Primary Max Current	2624.3A
Primary Markings	X1-X2-X3
Primary Terminals	Pads
Secondary Voltage	416
Secondary Max Current	1387.9A
Secondary Markings	H1-H2-H3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 – 3.5%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-10
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

**1000KVA 220 VOLTS TO 416 VOLTS
THREE PHASE AUTOTRANSFORMER**



Country/Manufacturer	Canada/RPM
-----------------------------	----------------------------