


OFFICIAL QUOTE

150KVA 380 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



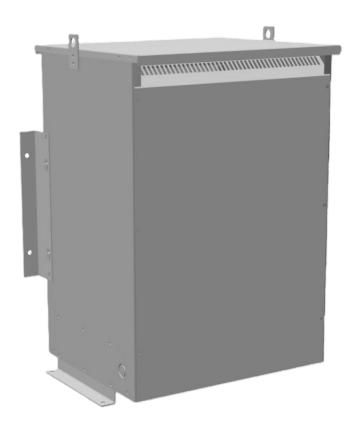

150KVA 380 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER


\$7,590.00 CAD


Three Phase Autotransformer with a capacity of 150kVA, transforming 380Y Volts to 600Y Volts

SKU: RC150F-J

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 150kVA, transforming 380Y Volts to 600Y Volts



OFFICIAL QUOTE



150KVA 380 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	451 lbs
Phases	<u>3</u>
kVA	150
Connection	3PhA-NT-1
Primary Voltage	380
Primary Max Current	227.9A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	600MCM-2
Secondary Voltage	600
Secondary Max Current	144.3A
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 - 3.0%
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

150KVA 380 VOLTS TO 600 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------