


#### **OFFICIAL QUOTE**

## 30KVA 220 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



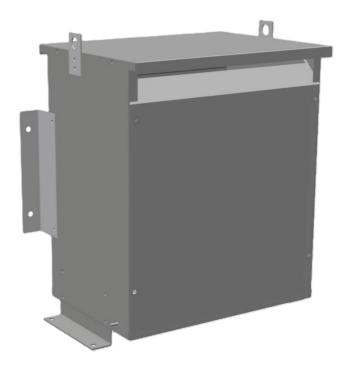

# 30KVA 220 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER

\$3,061.80 CAD

Three Phase Autotransformer with a capacity of 30kVA, transforming 220Y Volts to 400Y Volts

**SKU:** RC30C2-G1

**Categories:** Autotransformer

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 30kVA, transforming 220Y Volts to 400Y Volts



### **OFFICIAL QUOTE**



## 30KVA 220 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER

### **PRODUCT SPECIFICATIONS**

Weight	108 lbs
Phases	<u>3</u>
kVA	<u>30</u>
Connection	3PhA-NT-1
Primary Voltage	220
Primary Max Current	78.7A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2/0-6 AWG
Secondary Voltage	400
Secondary Max Current	43.3A
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-5</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



### **OFFICIAL QUOTE**

## 30KVA 220 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------