


OFFICIAL QUOTE

30KVA 600 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



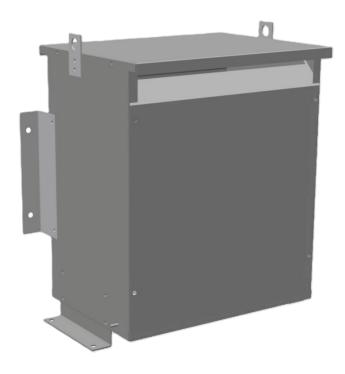

30KVA 600 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER

\$2,112.93 USD

Three Phase Autotransformer with a capacity of 30kVA, transforming 600Y Volts to 347Y Volts

SKU: RC30J-E

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 30kVA, transforming 600Y Volts to 347Y Volts



OFFICIAL QUOTE



30KVA 600 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	100 lbs
Phases	<u>3</u>
kVA	30
Connection	3PhA-NT-1
Primary Voltage	600
Primary Max Current	28.9A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	Terminal Blocks
Secondary Voltage	347
Secondary Max Current	<u>49.9A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-5</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

30KVA 600 VOLTS TO 347 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------