


OFFICIAL QUOTE

30KVA 600 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER



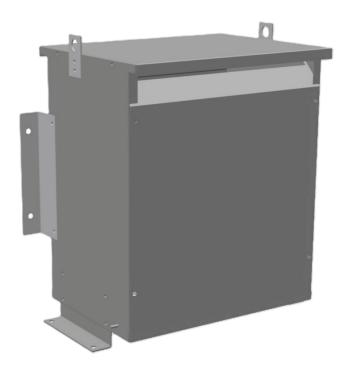

30KVA 600 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,796.50 CAD


Three Phase Autotransformer with a capacity of 30kVA, transforming 600Y Volts to 220Y Volts

SKU: RA30J-C2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 30kVA, transforming 600Y Volts to 220Y Volts



OFFICIAL QUOTE



30KVA 600 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	120 lbs
Phases	<u>3</u>
kVA	30
Connection	3PhA-NT-1
Primary Voltage	600
Primary Max Current	28.9A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	Terminal Blocks
Secondary Voltage	220
Secondary Max Current	78.7A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	#2/0-6 AWG
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	<u>45</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-5</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

30KVA 600 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
Country/Manufacturer	Canada/RPM