


OFFICIAL QUOTE

150KVA 400 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER



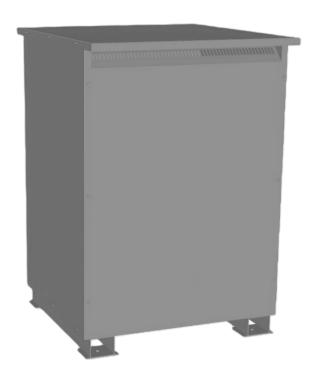

150KVA 400 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER


\$6,875.09 USD


Three Phase Autotransformer with a capacity of 150kVA, transforming 400Y Volts to 110Y Volts

SKU: RA150G1-A2

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 150kVA, transforming 400Y Volts to 110Y Volts







PRODUCT SPECIFICATIONS

Weight	739 lbs
Phases	<u>3</u>
kVA	<u>150</u>
Connection	<u>3PhA-NT-1</u>
Primary Voltage	400
Primary Max Current	216.5A
Primary Markings	H1-H2-H3
Primary Terminals	600MCM-2
Secondary Voltage	110
Secondary Max Current	787.3A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-8
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

150KVA 400 VOLTS TO 110 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------