


## **OFFICIAL QUOTE**

# 30KVA 600 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER



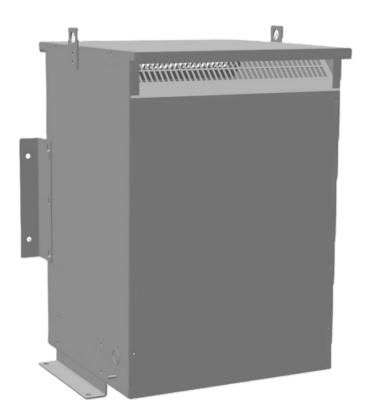

## 30KVA 600 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER


\$2,590.83 USD

Three Phase Autotransformer with a capacity of 30kVA, transforming 600Y Volts to 115Y Volts

**SKU:** RA30J-A1

**Categories:** Autotransformer

## **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





Three Phase Autotransformer with a capacity of 30kVA, transforming 600Y Volts to 115Y Volts



## **OFFICIAL QUOTE 30KVA 600 VOLTS TO 115 VOLTS** THREE PHASE AUTOTRANSFORMER



## **PRODUCT SPECIFICATIONS**

Weight	158 lbs
Phases	<u>3</u>
kVA	30
Connection	<u>3PhA-NT-1</u>
Primary Voltage	600
Primary Max Current	28.9A
Primary Markings	H1-H2-H3
Primary Terminals	Terminal Blocks
Secondary Voltage	115
Secondary Max Current	150.6A
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>2.5 – 4.5%</u>
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-6</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



## **OFFICIAL QUOTE**

# 30KVA 600 VOLTS TO 115 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------