


#### **OFFICIAL QUOTE**

## 150KVA 416 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER



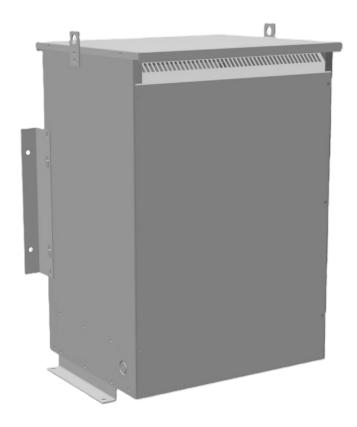

# 150KVA 416 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER


\$9,752.90 CAD


Three Phase Autotransformer with a capacity of 150kVA, transforming 416Y Volts to 220Y Volts

**SKU:** RC150G-C2

**Categories:** Autotransformer

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 150kVA, transforming 416Y Volts to 220Y Volts



## **OFFICIAL QUOTE**



# 150KVA 416 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	601 lbs
Phases	<u>3</u>
kVA	<u>150</u>
Connection	3PhA-NT-1
Primary Voltage	416
Primary Max Current	208.2A
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	600MCM-2
Secondary Voltage	220
Secondary Max Current	<u>393.6A</u>
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	<u>55</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-7</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



## **OFFICIAL QUOTE**

# 150KVA 416 VOLTS TO 220 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	------------