


OFFICIAL QUOTE

750KVA 208 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER



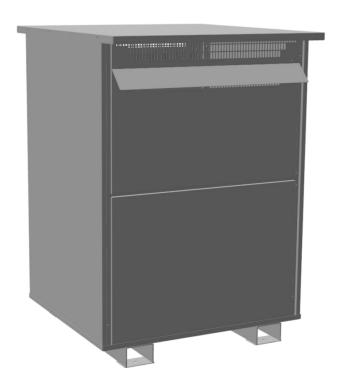

750KVA 208 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER


\$23,462.80 CAD


Three Phase Autotransformer with a capacity of 750kVA, transforming 208Y Volts to 380Y Volts

SKU: RA750B-F

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 750kVA, transforming 208Y Volts to 380Y Volts



OFFICIAL QUOTE



750KVA 208 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	2102 lbs
Phases	<u>3</u>
kVA	<u>750</u>
Connection	3PhA-NT-1
Primary Voltage	208
Primary Max Current	2081.8A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	<u>Pads</u>
Secondary Voltage	380
Secondary Max Current	1139.5A
Secondary Markings	<u>H1-H2-H3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
Insulation Class	220°C (Class H)
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 - 3.5%
Sound (db)	60
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-10</u>
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

750KVA 208 VOLTS TO 380 VOLTS THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	<u>Canada/RPM</u>
----------------------	-------------------