


OFFICIAL QUOTE

450KVA 600 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



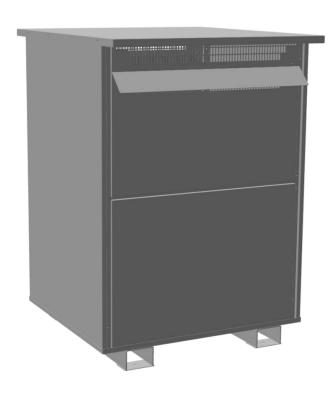

450KVA 600 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER


\$24,881.50 CAD


Three Phase Autotransformer with a capacity of 450kVA, transforming 600Y Volts to 120Y Volts

SKU: RA450J-A

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 450kVA, transforming 600Y Volts to 120Y Volts



OFFICIAL QUOTE



450KVA 600 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 2248 lbs |
| Phases | <u>3</u> |
| kVA | 450 |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | 600 |
| Primary Max Current | 433A |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | <u>Pads</u> |
| Secondary Voltage | 120 |
| Secondary Max Current | 2165.1A |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>Pads</u> |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 2.5 - 4.5% |
| Sound (db) | 60 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-10 |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

450KVA 600 VOLTS TO 120 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | Canada/RPM |
|----------------------|------------|
|----------------------|------------|